



**AQLU**  
CERAMIC

**Architecture**  
CHOICE

[www.aqluceramica.com](http://www.aqluceramica.com)



## About Us

integrate the strategic objectives in their management and production systems in a transverse manner, so that the implementation of processes that are respectful towards the environment are not limited to specific actions, but instead from a part of its know how as a whole.

objective is to offer personalized and customized solutions for architecture and interior design through pieces which work as a complement for coverings and floorings. With high levels of aesthetic value, the ceramic pieces we manufacture achieve in adding extra value to projects thanks not only to their finishes, but also to their suitable adaptability with the rest of the elements.

This reflects in this catalogue which we have created with utmost creativity. The catalogue is one of the principal tools that still nowadays keep together the relationship between firms, resellers and consumers.

Once again following its own style, translates the trends and the innovations of the ceramic sector in something captivating and usable for the everyday design.



# BRECIA EARIC





**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 4

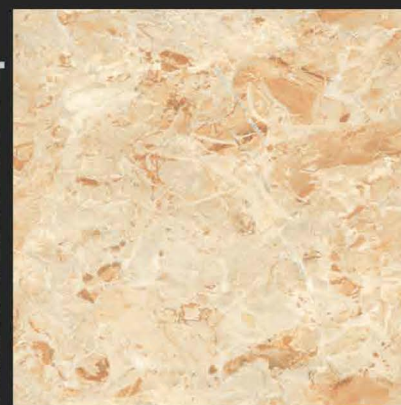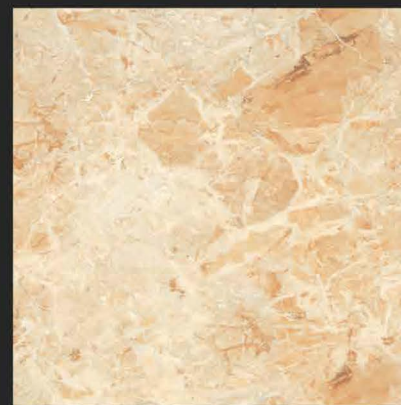



# BRECIA LYTHOS




**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3

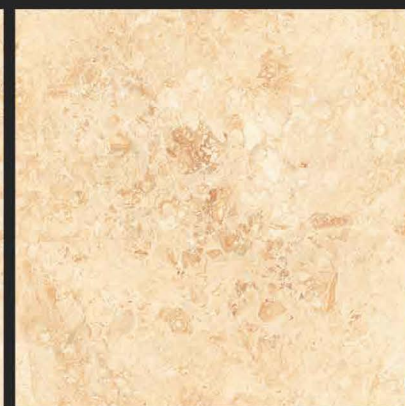



# BRECIA OTHELO



**600x600 mm**


GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3



# CALCUTTA NOUNCE

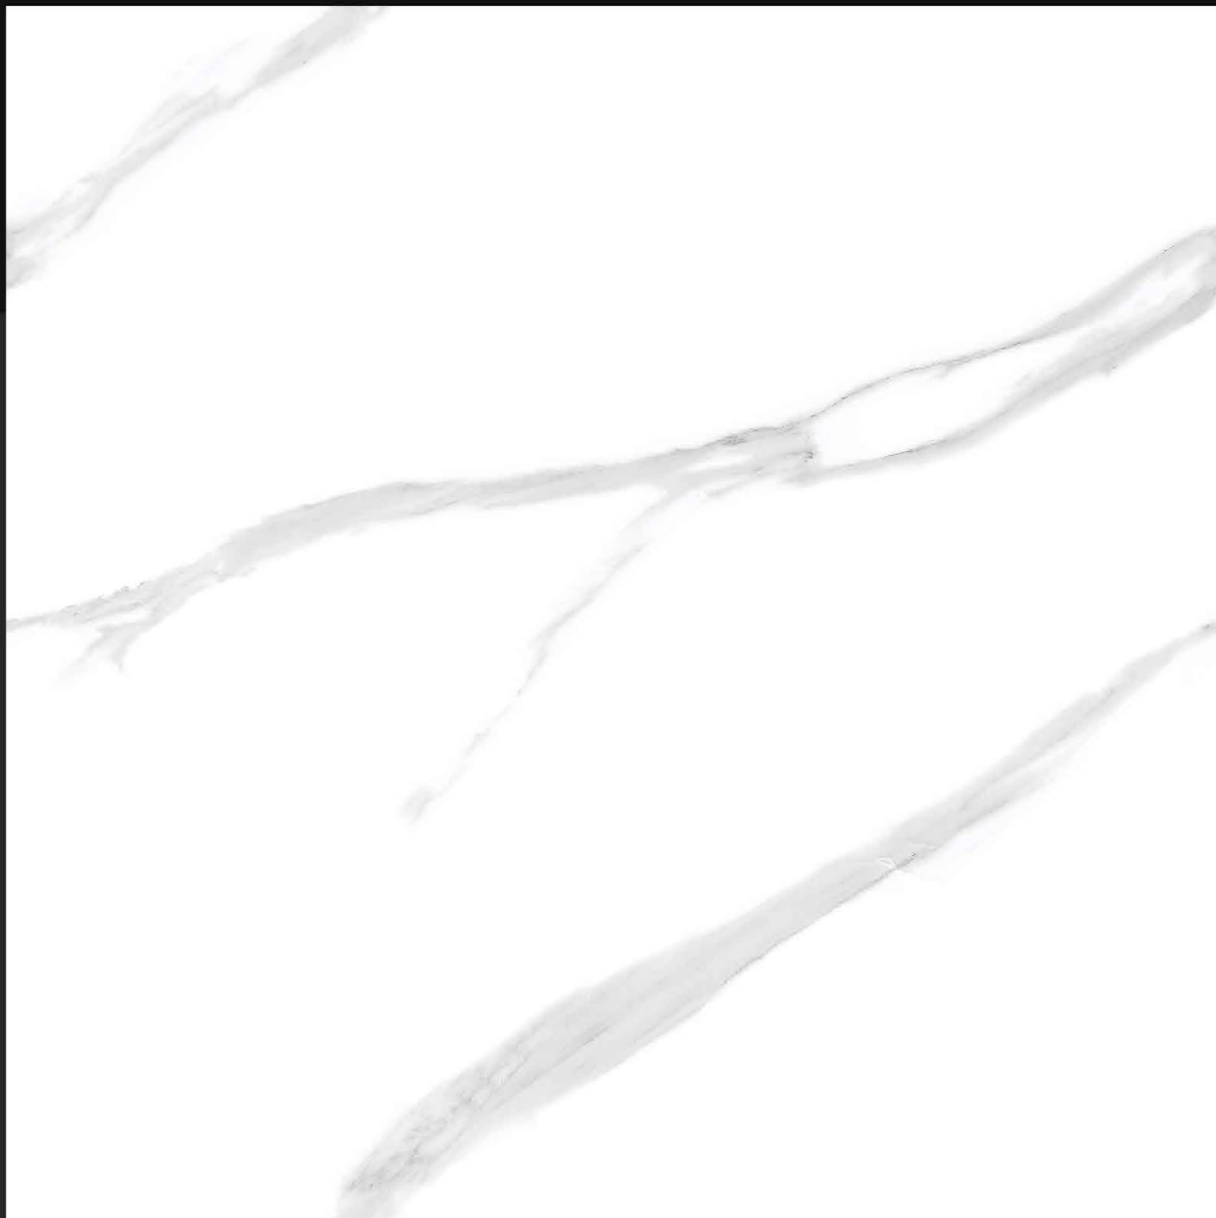


**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3

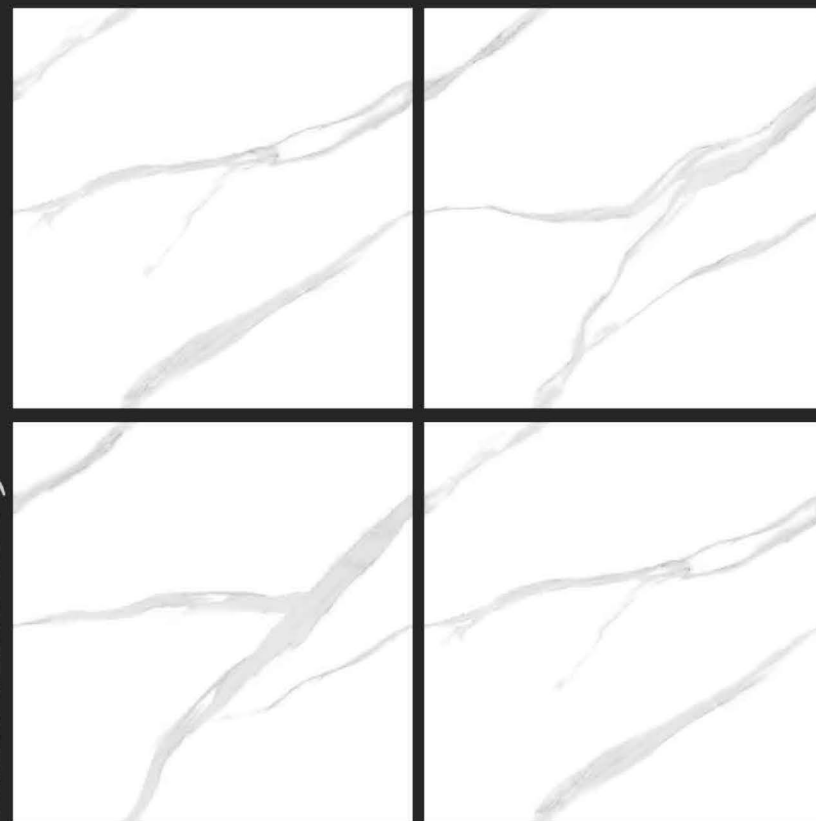



# DYNA GOLDY




**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3

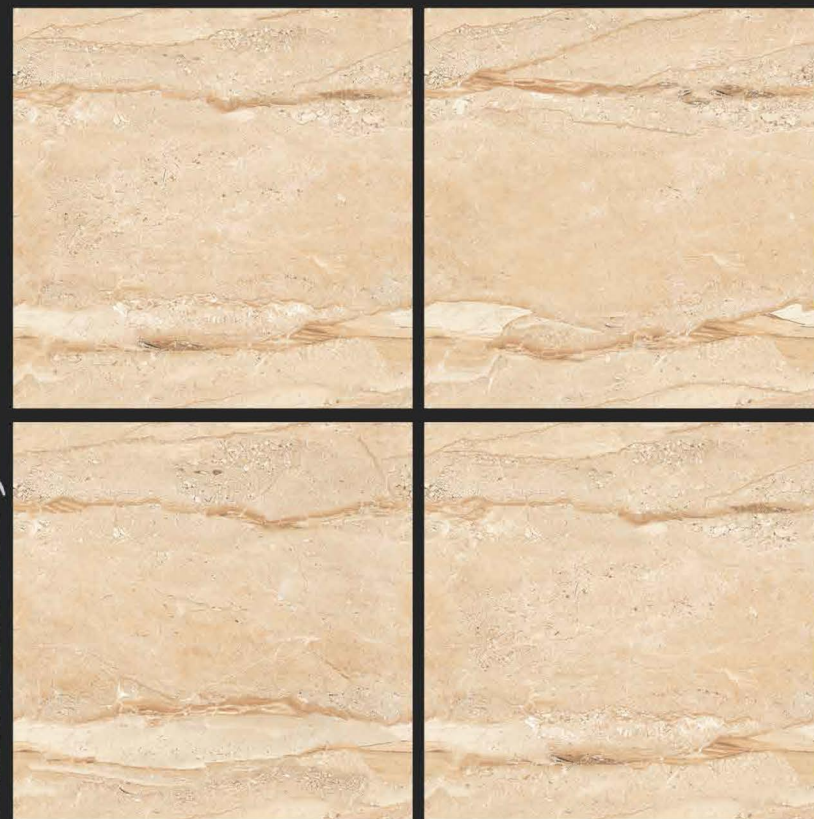



# DYNA LAXO



**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3





**DYNA SILIVIA**



**600x600 mm**  
GLAZED VITRIFIED TILES

FINISH-**POLISHED**

**Random Face 3**





# IMPERIAL BLANCH



**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3





# MAGNUM CLASSIC STATURIO



**600x600 mm**

GLAZED VITRIFIED TILES


FINISH-**POLISHED**

Random Face 3





# STERLING BEIGE

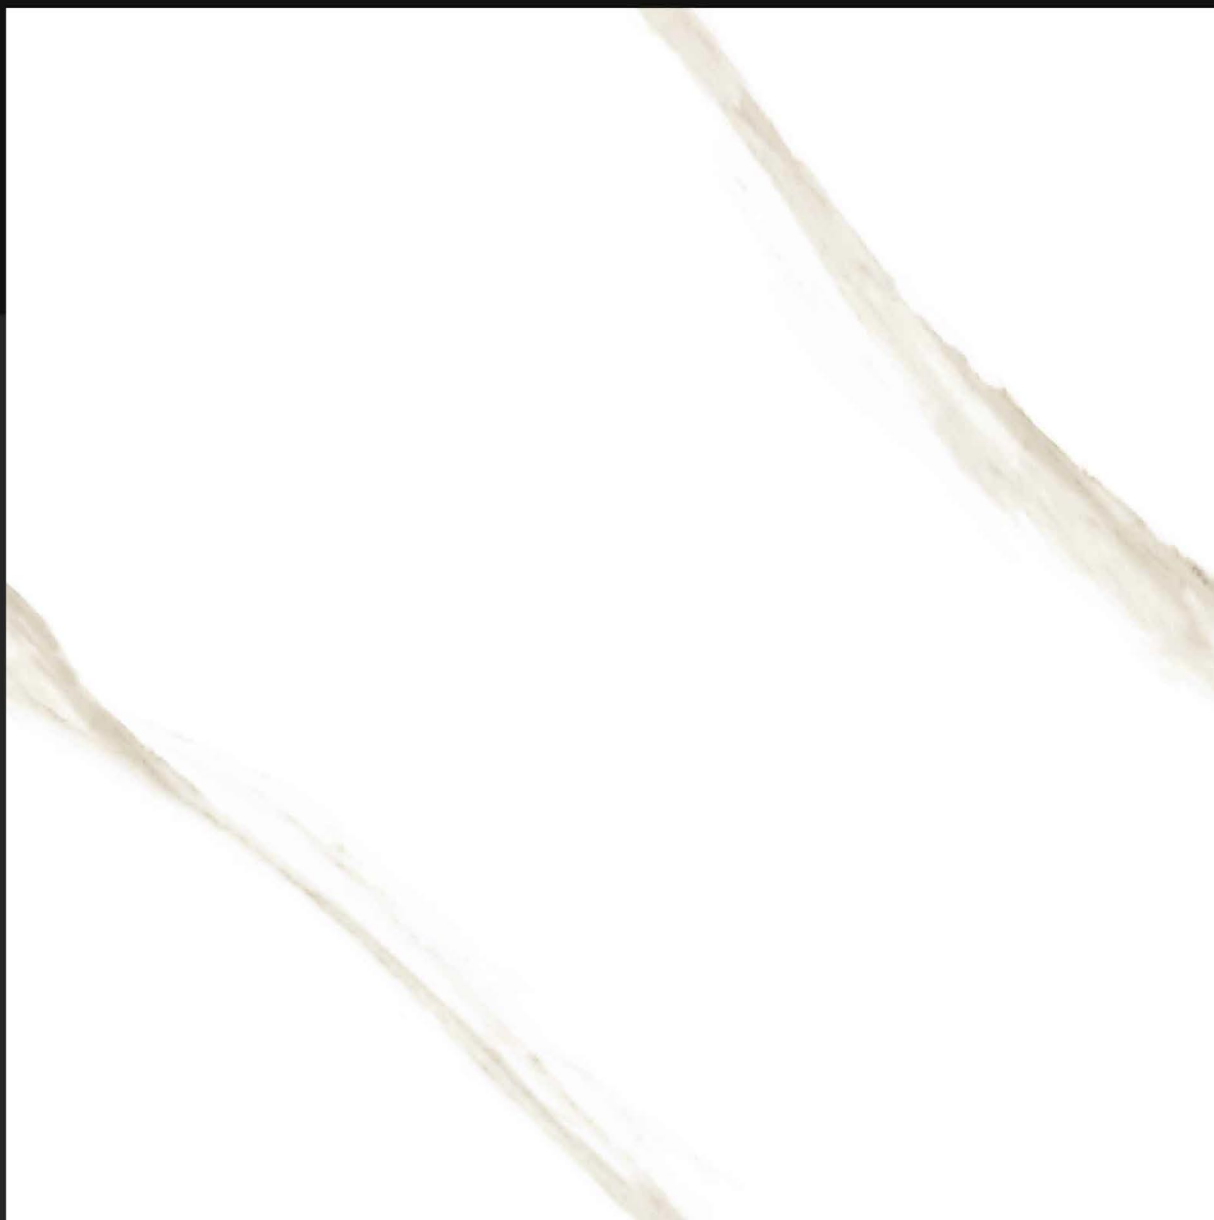


**600x600 mm**

GLAZED VITRIFIED TILES


FINISH-**POLISHED**

Random Face 3

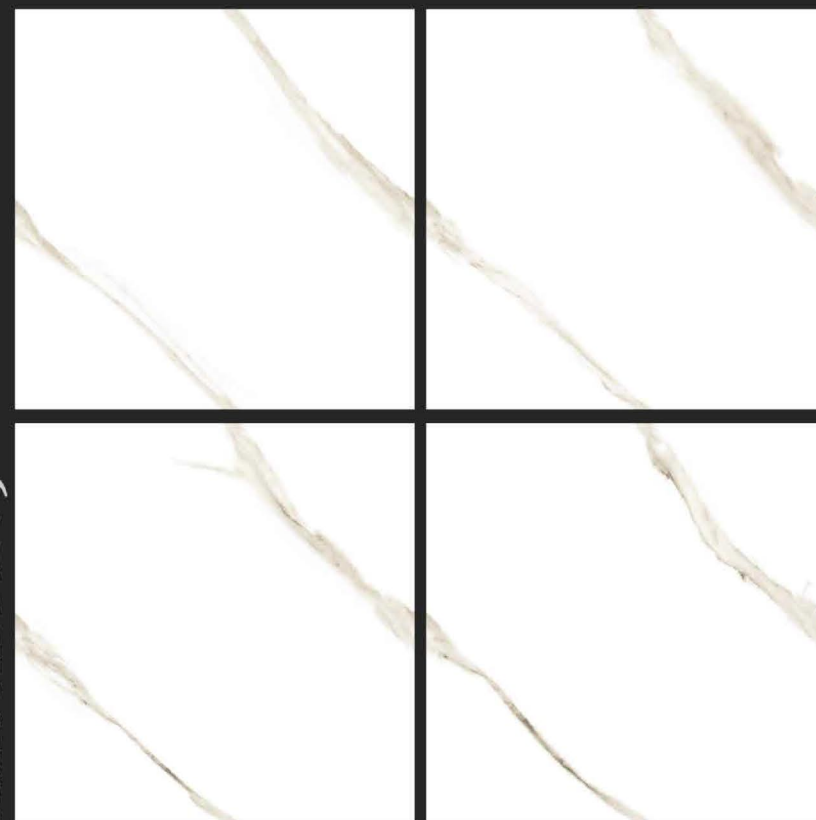



# STERLING GREY

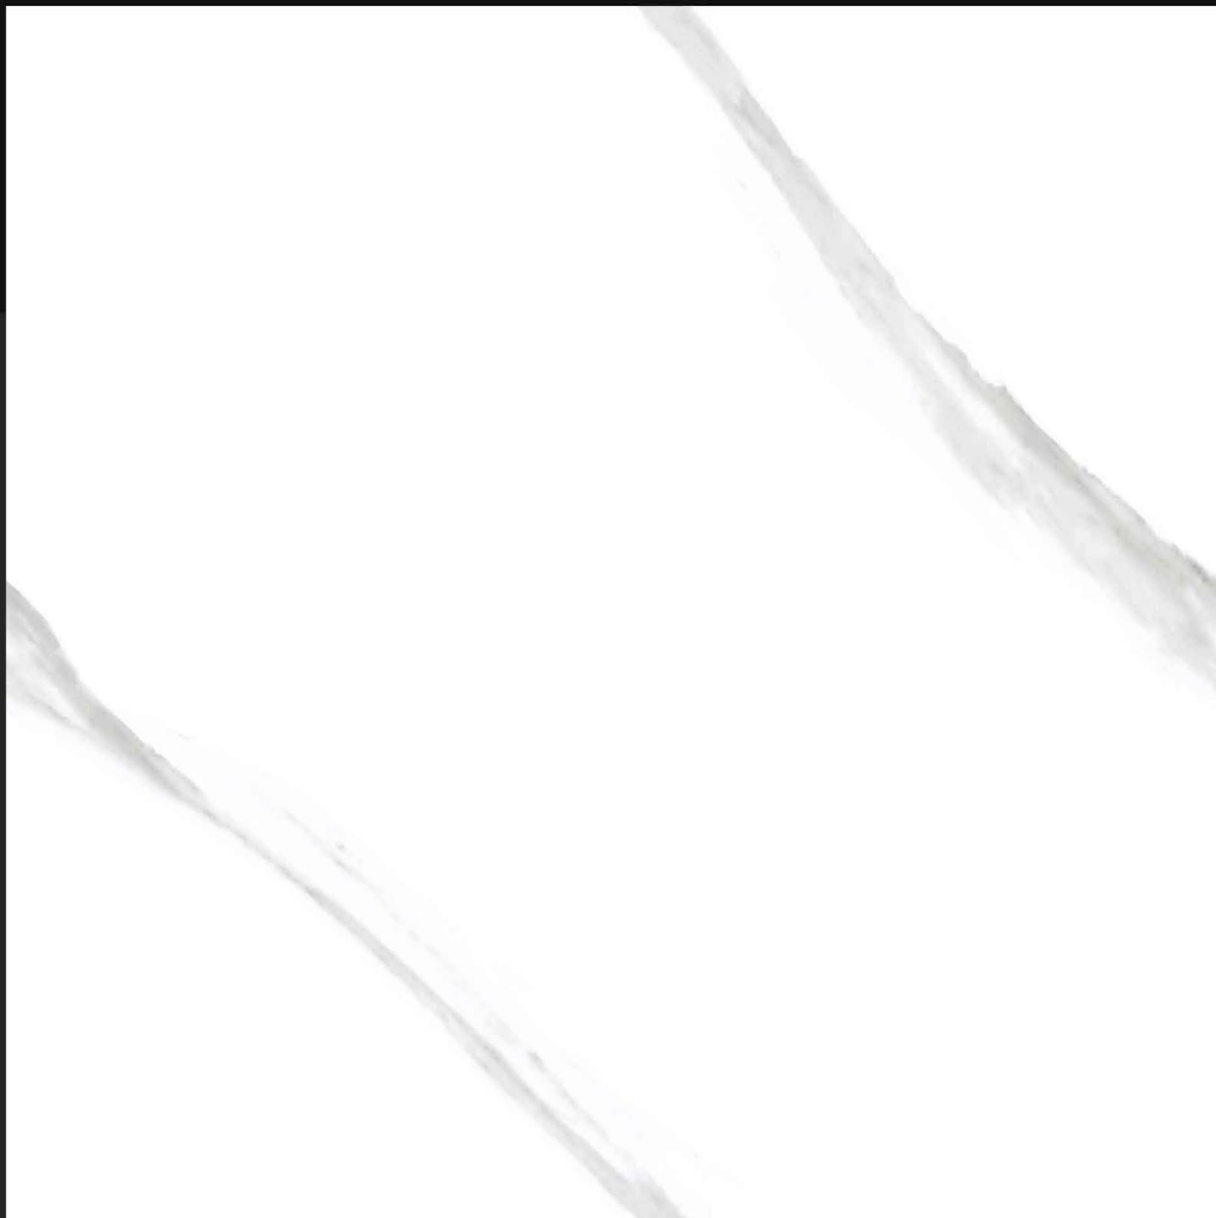


**600x600 mm**

GLAZED VITRIFIED TILES

FINISH-**POLISHED**

Random Face 3

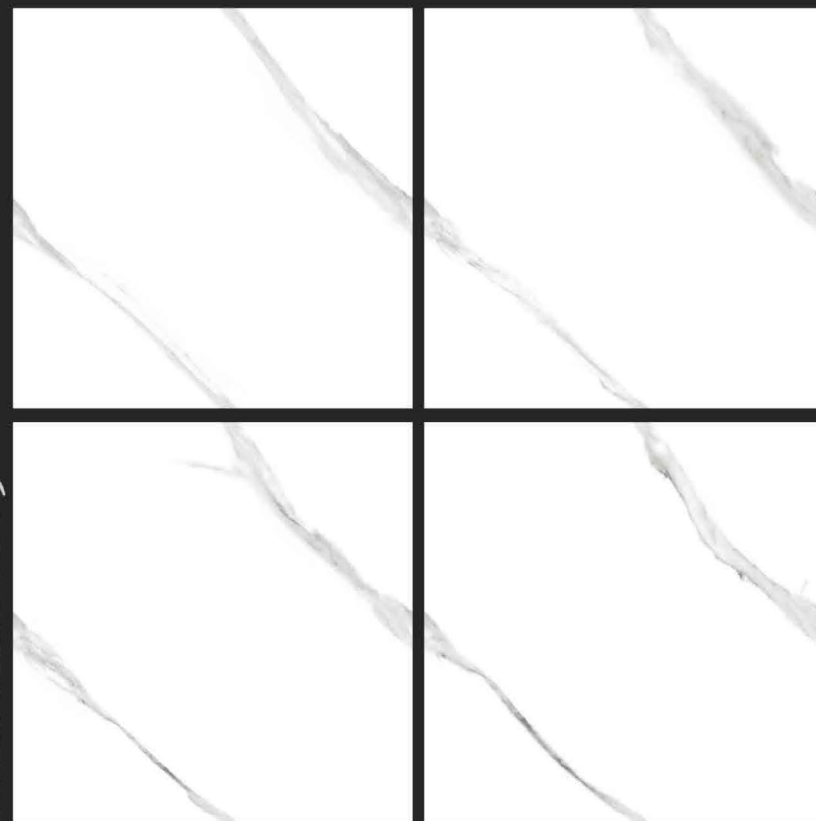



## OUR PRESENCE IN MORE THEN 65+ COUNTRIES

We always ensure that our buyers get the full value of their money once they place order with us. We always adhere to the delivery schedule stipulated in the contracts and ship the goods timely to our buyers, We closely examine the entire product development & carefully monitor the production process and only after the products go through the multiple quality assurance tests, we consider them ready for delivery. We ensure that each product perfectly meets the specifications required by our buyers

export



warehouse

- Amman City, Jordan
- Misurata City, Libya
- Basra City, Iraq
- Dubai, United Arab Emirates
- Beirut, Lebanon
- Nouakchott, Mauritania

*The best time*  
company ever



**AQLU**  
CERAMIC

+91 9638470770 | +91 7984015714

[www.aqluceramica.com](http://www.aqluceramica.com)

[aqluceramicllp@gmail.com](mailto:aqluceramicllp@gmail.com)

## TECHNICAL SPECIFICATION

### GLAZED PORCELAIN TILES - POLISHED (PGVT)

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	OUR VALUE	TEST METHOD
<b>REGULATORY PROPERTIES</b>			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Surface quality	Min. 95% defect free	> 95%	ISO 10545-2
Colour difference	Unaltered	Unaltered	ISO-10545-16
Glossiness	> 90 GU	> 94 GU	Gloss meter 60°
<b>STRUCTURAL PROPERTIES</b>			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>			
Modulus of rupture	> 35 N/mm <sup>2</sup>	> 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	> 1300 N	> 1800 N	ISO-10545-4
Impact resistance (COR)	>0.55	>0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>			
Surface abrasion resistance	Declared class	Class PEI 3	EN 154
Surface scratch hardness (Mohs scale)	5	5	EN 101
<b>THERMO HYGROMETRIC PROPERTIES</b>			
Frost resistance	Test passed in accordance with test method	Pass	ISO-10545-12
Thermal shock resistance	Min. 10 cycle	Pass	ISO-10545-9
Moisture expansion	0.06mm/m	0.01mm/m	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10	Max. 6.5 x 10	ISO-10545-8
Crazing resistance	No damage	No damage	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
<b>SEFETY PROPERTIES</b>			
Slip resistance (COF)	Declared value	> 0.40 dry, <0.40 wet	ISO-10545-17
Reaction to fire	Class A1 or A1 fl	Class A1 - A1 fl	N.A

## PACKING DETAILS

Size	Thickness	psc. / box	m <sup>2</sup> / box
600x600mm	8.7mm (Approx.)	4 pcs	1.44 Sq. Mtr.



**Thank You**